



Smart-Joint - Butt Fusion

ISO Flange Adaptor Suit for BF

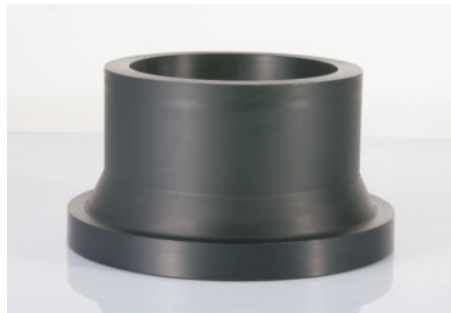

Raw Material:PE100 PE100RC PERTII
 Standard:ISO4427-3 EN12201-3 ISO22391-3
 Other SDR can be supplied per request
 Followed parameters are for reference.

Code	SizeΦ(mm)	SDR	B	L	t	A	C
BFFL32A	32	11	73	45	10	68	40
BFFL40A	40	11	80	45	10	78	50
BFFL50A	50	11	94	59	12	86	56
BFFL63A/B	63	11/17	91	64	12	102	76
BFFL75A/B	75	11/17	103	70	12	122	82
BFFL90A/B	90	11/17	125	86	17	138	105
BFFL110A/B	110	11/17	130	95	18	156	122
BFFL125A/B	125	11/17	135	95	18	158	132
BFFL140A/B	140	11/17	130	93	20	188	155
BFFL160A/B	160	11/17	155	99	28	212	175
BFFL180A/B	180	11/17	144	106	25	212	180
BFFL200A/B	200	11/17	165	113	27	268	232
BFFM225A/B	225	11/17	142/134	85	32/24	268	235
BFFM250A/B	250	11/17	148/138	85	35/25	320	285
BFFM280A/B	280	11/17	148/138	85	35/25	320	291
BFFM315A/B	315	11/17	150/140	85	35/25	370	335
BFFM355A/B	355	11/17	160/150	90	40/30	430	373
BFFM400A/B	400	11/17	170/158	90	45/33	482	427
BFFM450A/B	450	11/17	185/162	90	60/37	585	514
BFFM500A/B	500	11/17	195/175	100	60/40	585	530
BFFM560A/B	560	11/17	195/180	100	60/45	685	615
BFFM630A/B	630	11/17	205/185	100	70/50	685	642
BFFM710A/B	710	11/17	235/205	120	85/55	800	737
BFFM800A/B	800	11/17	240/212	120	90/62	905	840
BFFM900A/B	900	11/17	245/220	120	95/70	1005	944
BFFM1000A/B	1000	11/17	250/220	120	100/70	1110	1047
BFFM1100A/B	1100	11/17	260/230	120	110/80	1230	1149
BFFM1200A/B	1200	11/17	270/240	120	120/90	1330	1234